


ACTUATORS · DIN RAIL

Universal Dimming Actuator, 4-Fold

SKU ASUD-04/02.3 · DIN rail mounting

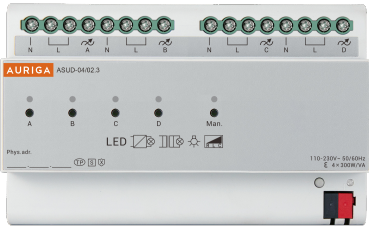

DESCRIPTION

Universal dimming actuator, 4-fold, 8SU MDRC. Four channels of RLC and LED dimming for the lighting circuits of an entire zone, mounted in the electrical cabinet.

The Dimming control unit is designed for precise dimming control in lighting systems. Featuring 2 or 4 channels with a maximum switching current of 300W per channel. It enables local manual operation.

SPECIFICATIONS

SKU	ASUD-04/02.3
Mounting	DIN rail, 8SU MDRC
Channels	4 × 300 W/VA
Load types	RLC · LED
Supply	110-230 V~ 50/60 Hz
Bus	KNX TP

APPLICATION

LOAD TERMINALS

Four dimming channels, N/L per channel

KNX TP CONNECTOR

Bus terminal with manual channel control